

AWNING WINDOW, BAR OPERATED



AA SERIES - 90mm FRAME

Rylock's 'Bar Operated' Awning Window is designed to suit tall/thin & short/wide awning sashes. These configurations are increasingly popular in modern housing designs, but require more than a central operator to close properly & efficiently.



To ensure a tight seal when closed, two separate mechanical latches clamp the sash tightly against the outer frame. The dual seals surrounding the perimeter of the sash are then able to exclude wind & water.




The operator handle folds neatly away from window dressings, giving a clean internal appearance. Fly screens (with extruded frames) are easily removed from the inside for cleaning

Outer frame & sash corners are mitred, enhancing the clean appearance of the window. The substantial 90mm frame couples neatly with large fixed panels & a variety of door products. Maximum sash sizes are typically **2400mm high by 900mm wide**, or **900mm high by 2400mm wide**. Either way, the maximum sash area is 2.1 square metres

AWNING WINDOW, BAR OPERATED



AA SERIES - 90mm FRAME

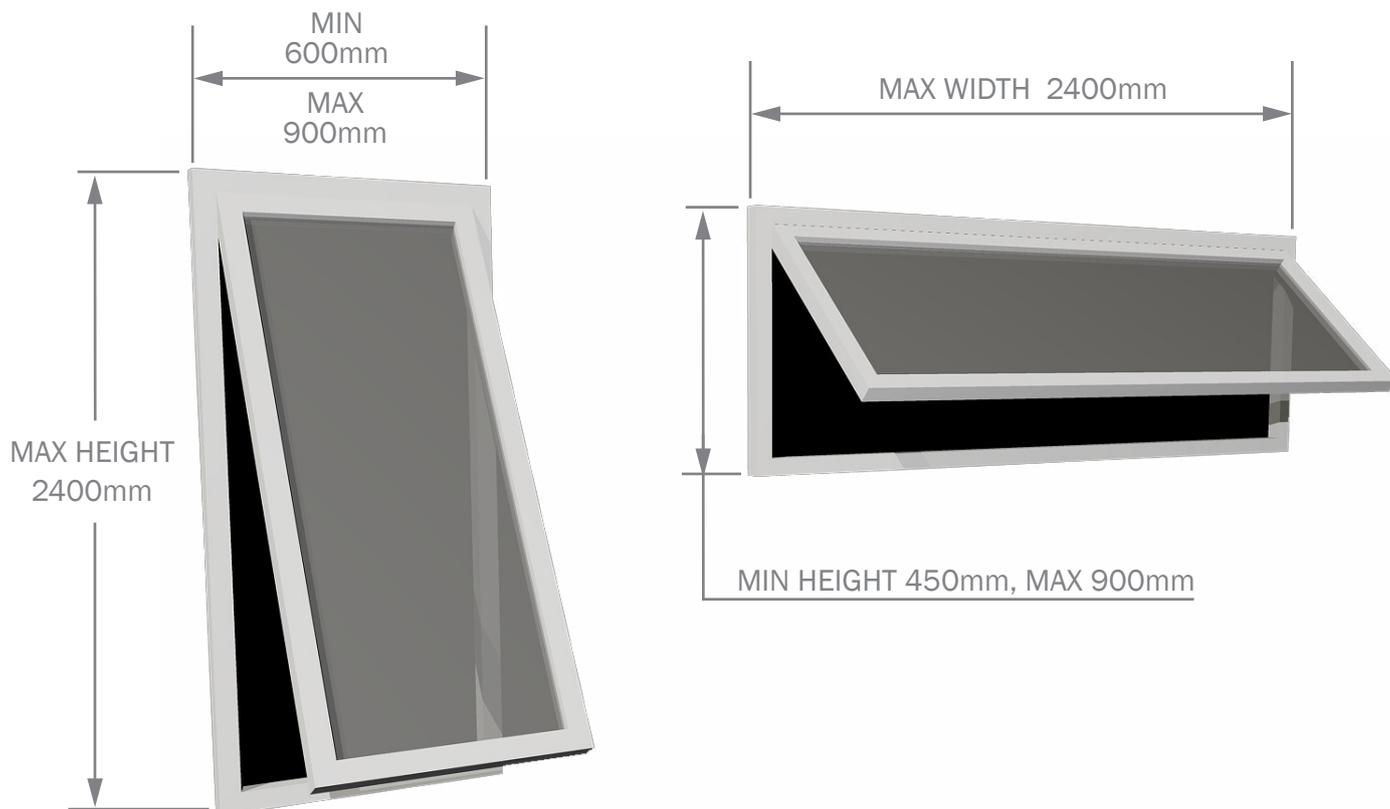

NOTE: MAXIMUM SASH SIZE IS 2.1 sq. m. ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum double glazed panel thickness is 22mm

Maximum sash weight of 54kg (typically 4mm glass / 12mm argon / 4mm glass)

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: Operator & latch colour, frame equaliser, frame infill, sill flap, glass type