BIFOLD DOOR (BOTTOM ROLL)

AA SERIES

'Summit' (L) or 'Aria' handles - in Black or Satin Chrome - are the standard options

Flush-bolts are fitted top & bottom on all fold away panels

A shallow sill profile minimises the threshold between indoor & external flooring levels

AA Series doors accept a wide selection of high performance glazing options, typically starting with clear double glazing

Centor Architectural carriages ensure the smoothest of operation. With most weight bearing on the sill, overhead works are minimised

A clever silicone seal keeps the bottom carriages isolated from dirt & debris when in service

BIFOLD DOOR (BOTTOM ROLL)

AA SERIES

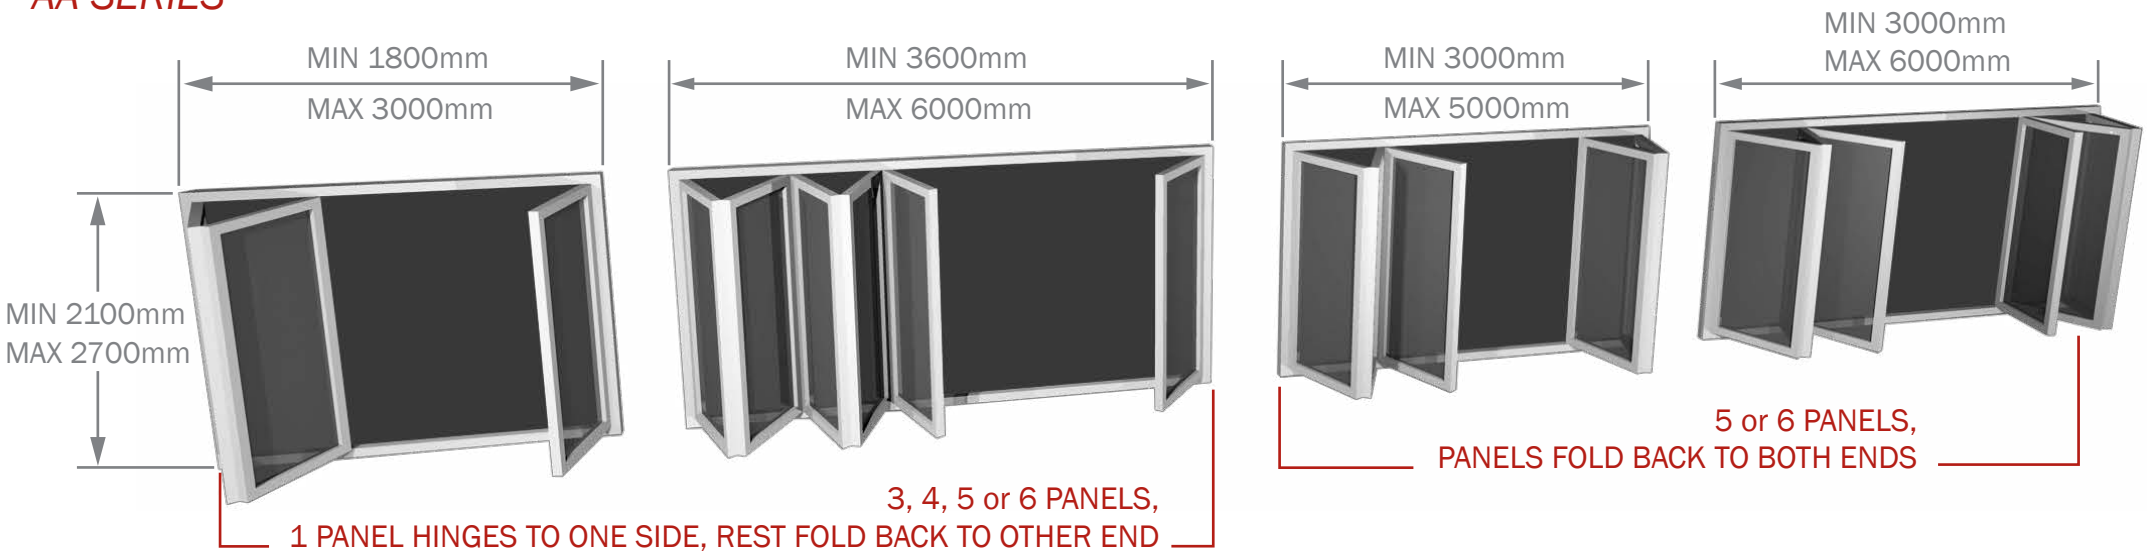

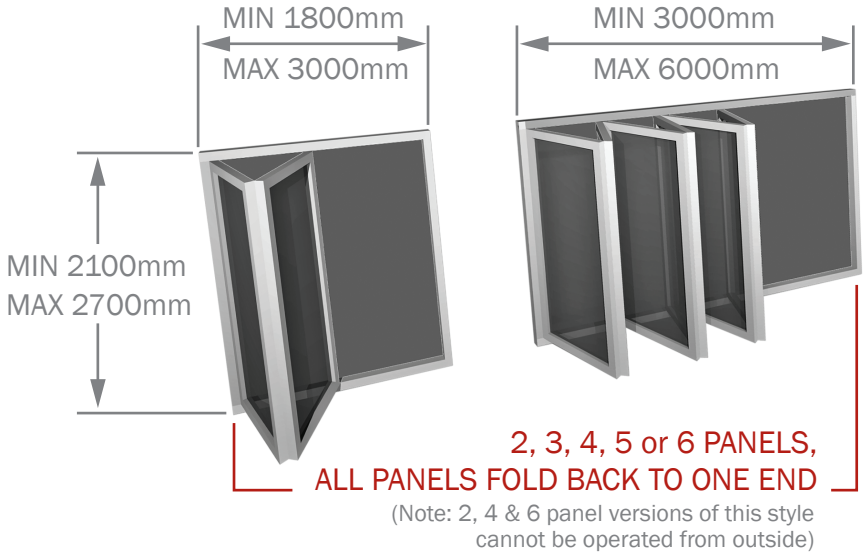

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE.
FOR SIZES OUTSIDE OF THESE (eg: servery window)
PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height and width

Hardware

Two-Point Lock for master panel, flush mount lock bolts for all other panels

Centor hardware is finished in brushed stainless-steel. To ensure hardware longevity, please refer to the Centor Maintenance brochure available from your Sales Consultant, or online

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Glazing to be grade A safety glass, to a maximum of 22mm thick

Certification

A glazing certificate can be supplied upon request

Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour, glass type