

# CASEMENT WINDOW

AA SERIES



Casement windows allow for efficient ventilation, through the use of cross-breezes




Outer frame & sash corners are mitred, enhancing the clean appearance of the window. Fixings are made from durable stainless steel




Wedgeless latches offer simple operation

An inline reveal simplifies installation into a variety of wall types, whilst an optional snap-in frame closure has a 15 x 3mm pocket to insert flashing into



Double action hinges allow the sash to open fully, maximising airflow


All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santroprene inner seal resists shrinkage & also assists with weatherproofing

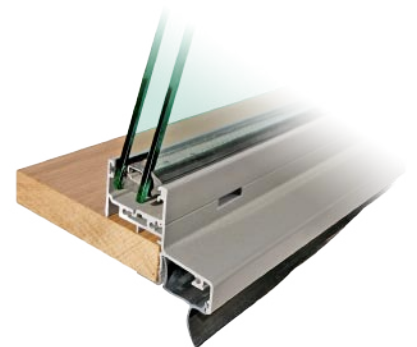

An optional sill flap can be specified when required

# CASEMENT WINDOW

## AA SERIES

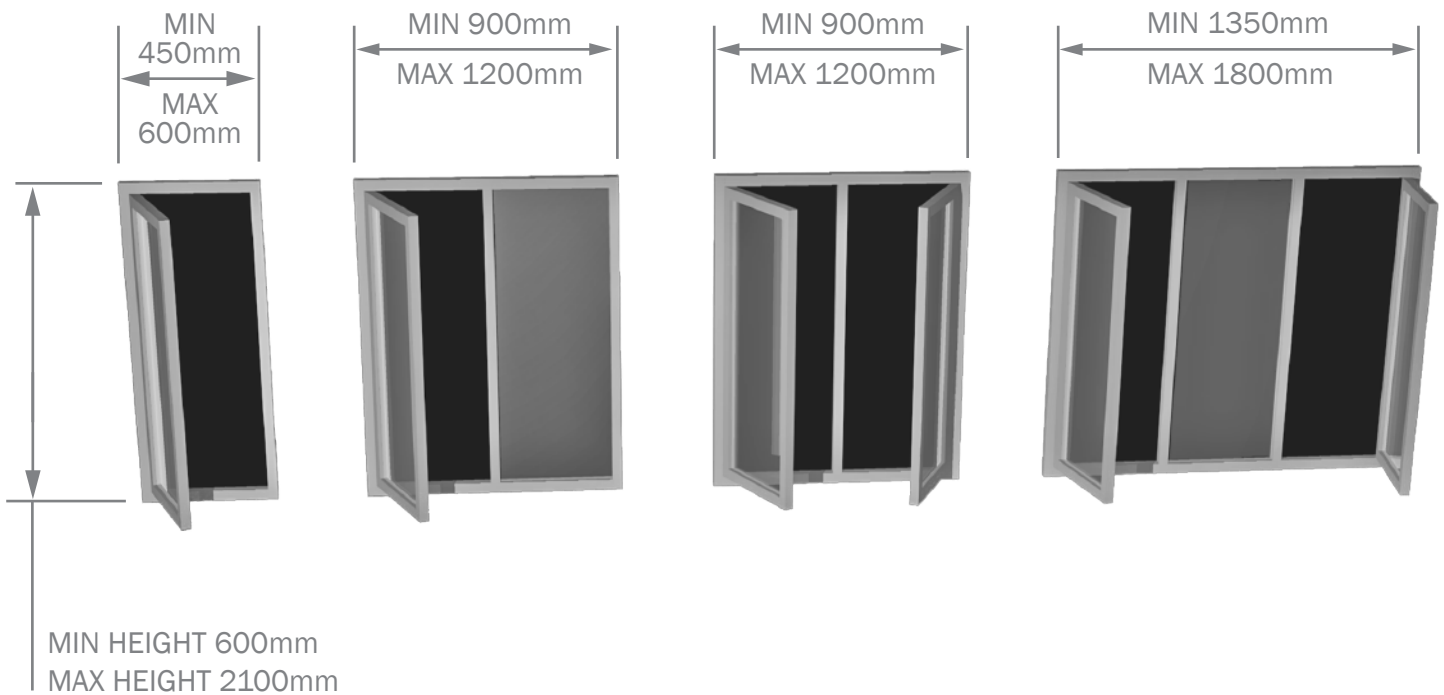

### NOTE:

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum double glazed panel thickness is 22mm

Maximum sash weight of 25kg (typically 4mm glass / 12mm argon / 4mm glass)

### Certification

Certified performance data including WERS ratings are available for this product on request

### Specify

Frame colour, configuration, height, width & overall depth

Optional: latch colour, flyscreen, frame infill, sill flap, glass type