


COMMERCIAL (DG) LITE



AA SERIES

The Commercial (DG - double glazed only) Lite has one simple purpose - to fulfil the requirements of very large, single-panel double glazed windows.

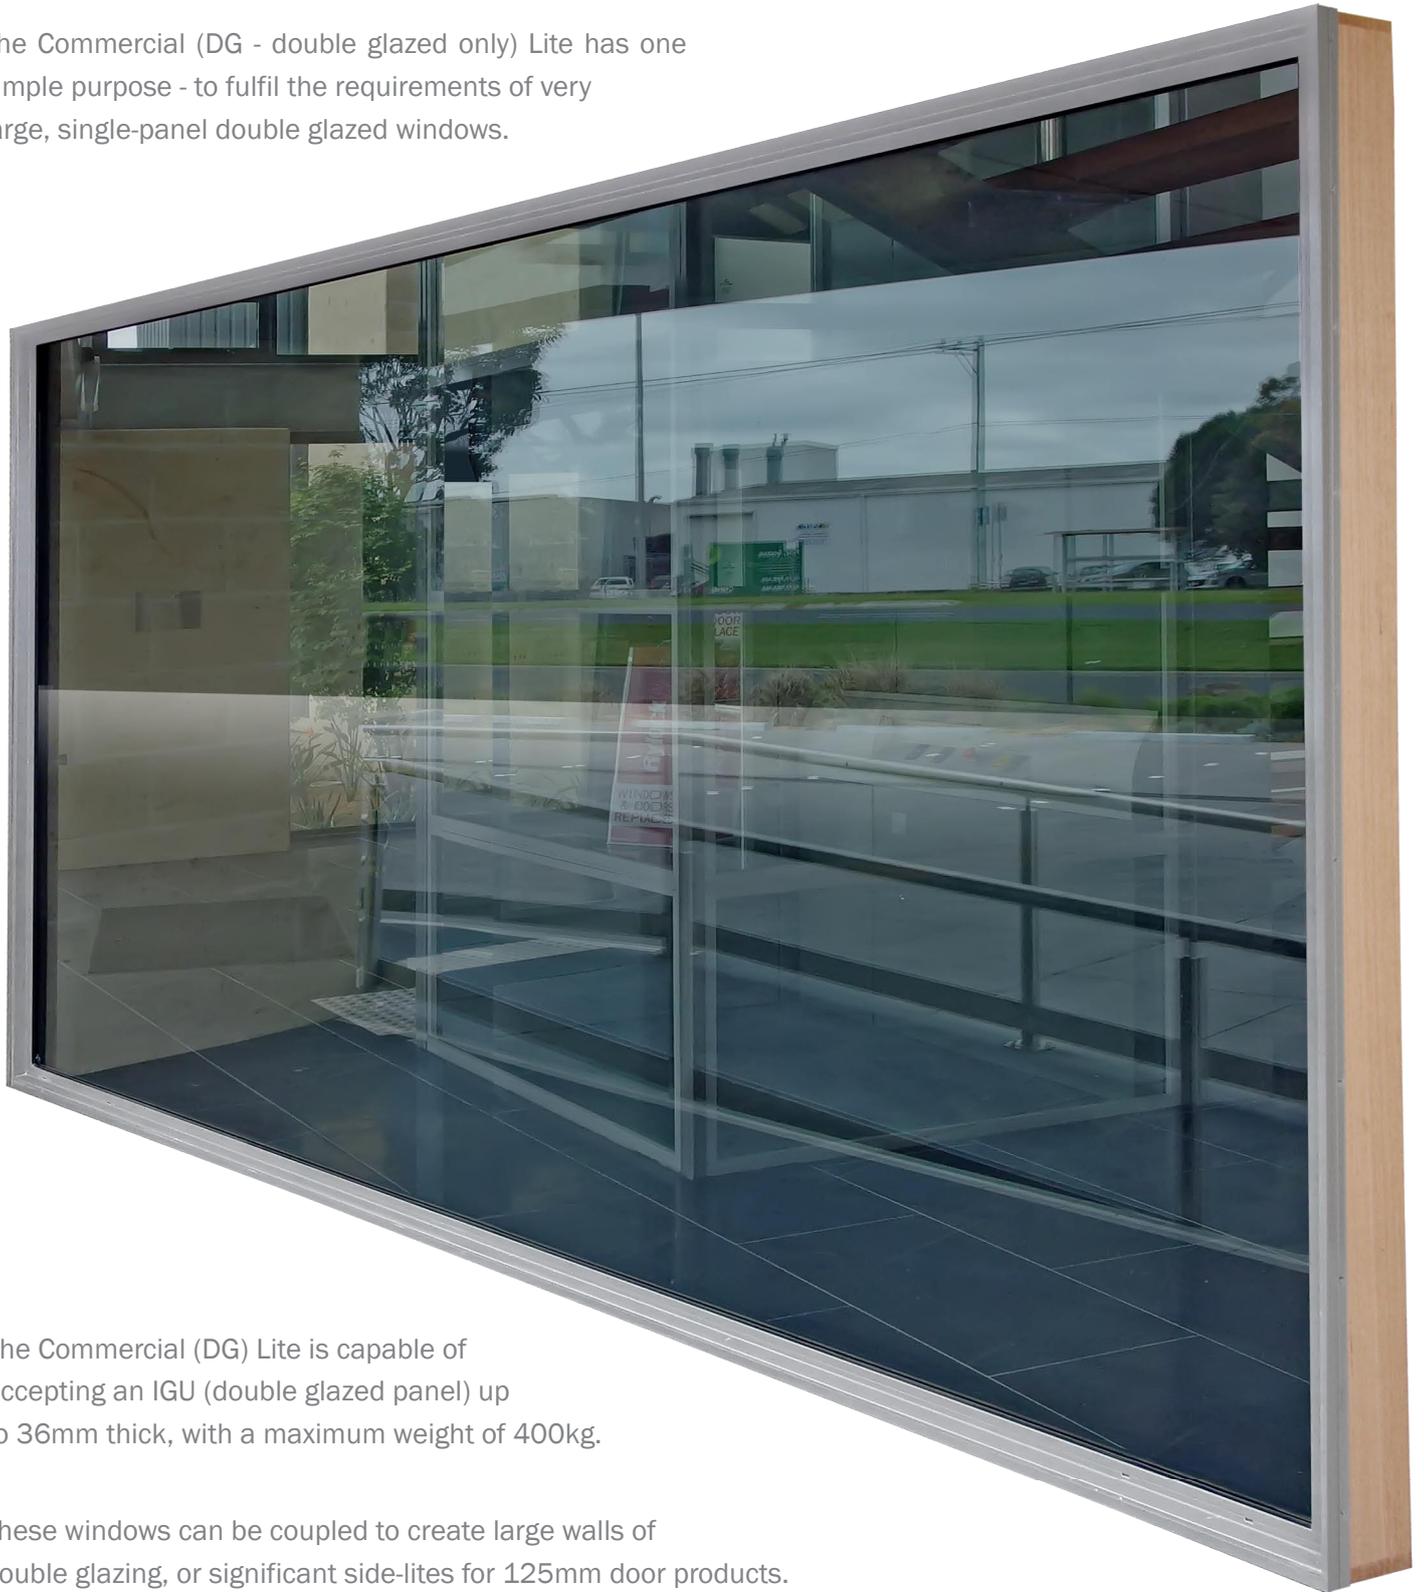

The Commercial (DG) Lite is capable of accepting an IGU (double glazed panel) up to 36mm thick, with a maximum weight of 400kg.

These windows can be coupled to create large walls of double glazing, or significant side-lites for 125mm door products.


A fixing pocket to the inside accepts a neat cover strip post-installation. Like most AA Series products, there exists the option of a 19mm hardwood reveal or for a 'commercial look' the A305 Reveal Equaliser (in aluminium).

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santoprene inner seal resists shrinkage & also assists with weatherproofing

COMMERCIAL (DG) LITE



AA SERIES

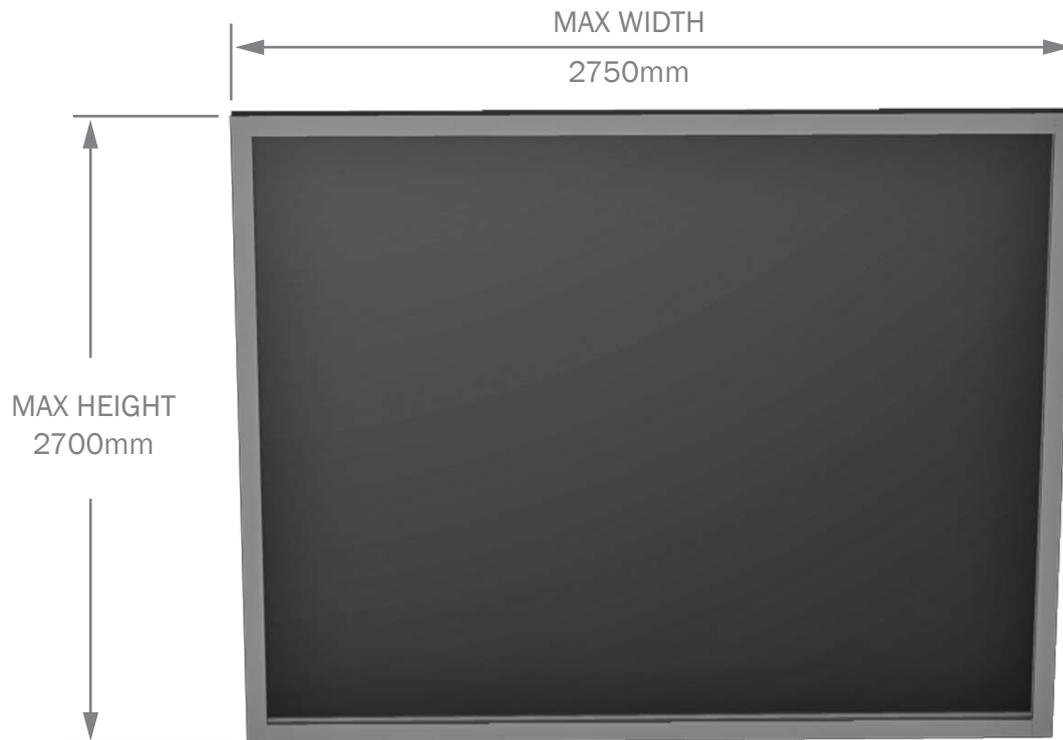

DOUBLE GLAZED SIZES

NOTE THAT HEIGHT & WIDTH MAY BE VARIED AS LONG AS TOTAL AREA REMAINS THE SAME (7.5 SQ. M. OR LESS), SUBJECT TO RESTRICTIONS ON HEIGHT vs. WIDTH RATIO

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE THESE - INCLUDING MULTIPLE, COUPLED UNITS - PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Double glazed panels typically contain 8mm toughened glass, 16mm air space, 8mm toughened glass

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, height, width & overall depth

Optional: frame equaliser, frame infill, sill flap, glass type