

# HORIZONTAL SLIDING WINDOW



## RYLOCK BAL C40 SERIES

Rylock's BAL C40 Sliding Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these horizontal sliding windows include specific componentry to pass the rigours of the exacting test regime

BAL C40 Sliding Windows also address one of the most common criticisms aimed at sliding products - too much visible window frame obscuring glazed areas. To counter this, the sash support is largely hidden within the window frame - resulting in more access to light & landscapes. From an energy efficiency perspective, this means less window frame & improved thermal performance

Clear acrylic handles are functional yet minimal



Each sliding sash has two dual-wheel carriages, rated at 22kg each.



Running on an anodised track, these carriages ensure smooth operation even with large double glazed panels

The unique keyed lock-body & dust cover hinge are cast from stainless steel, then finished with an elegant brushed treatment




All openings are protected from unexpected ember attack through heavy-duty fly screens, which combine strong extruded frames with Stainless Steel mesh

The window can also be vent-locked for secure air-flow

# HORIZONTAL SLIDING WINDOW



## RYLOCK BAL C40 SERIES

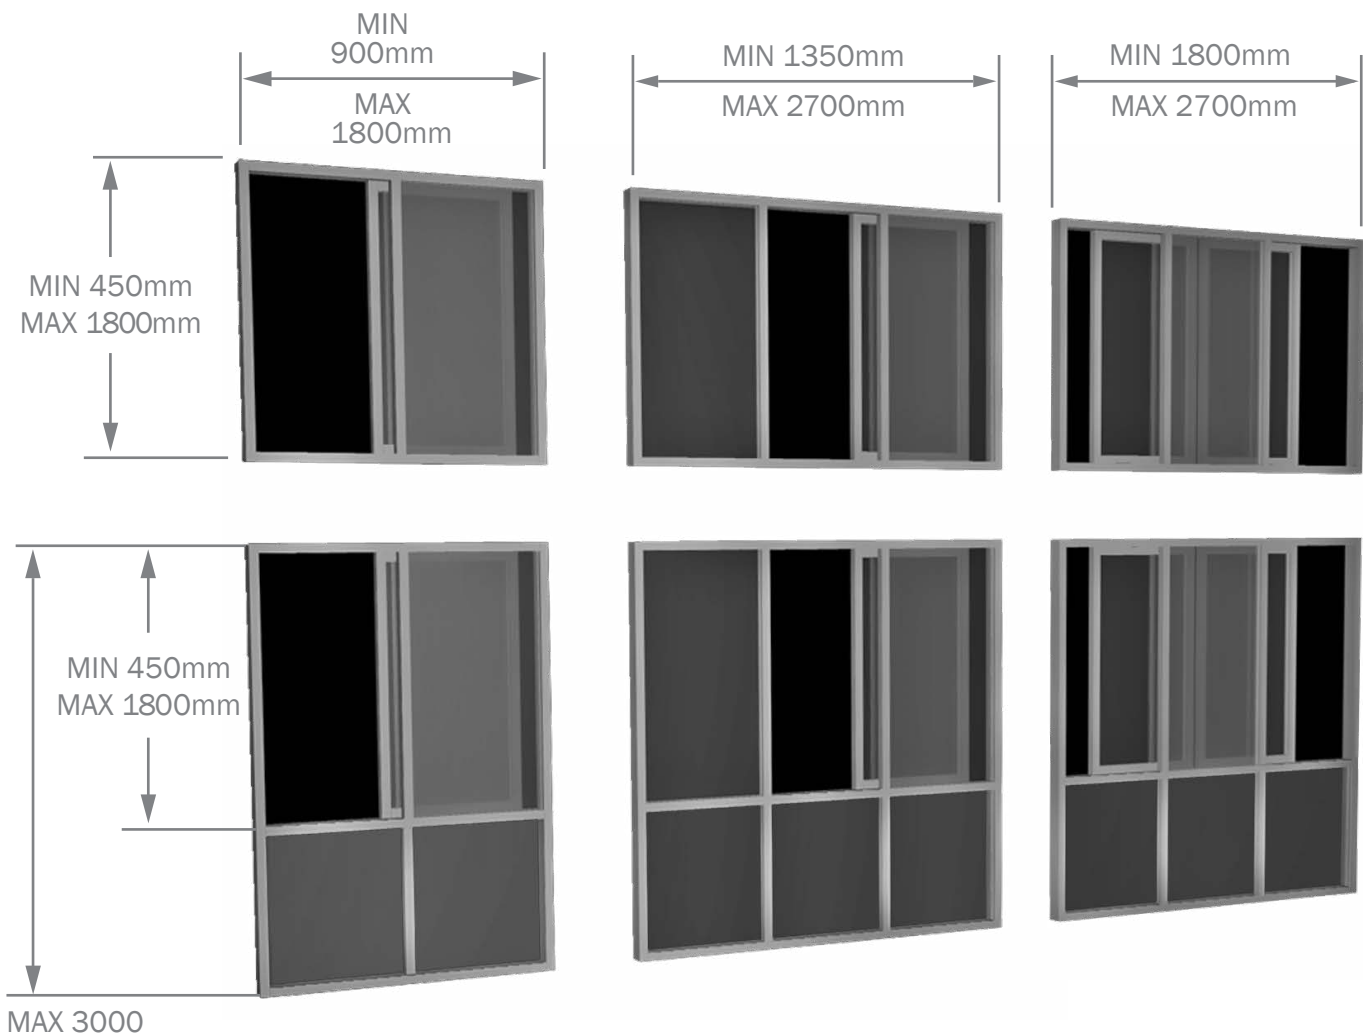

NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA, OR 2400mm IN ANY DIMENSION  
OUTER FRAME CANNOT EXCEED 3000mm IN EITHER HEIGHT OR WIDTH

**NOTE:** SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE  
PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40 double glazing' only

Any opening sash will be screened with stainless steel mesh

### Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

### Specify

Frame colour, configuration, height, width & overall depth

Optional: reveal equaliser, external frame infill, sill flap, glass type