


FIXED LITE WINDOW

SG SERIES




A wide selection of high performance glass types can be specified within the SG Series. These include body tints, super tints & a range of laminated glass up to 6.76mm in thickness

Mitred corners enhance the window's clean appearance. All fixings are made from durable stainless steel

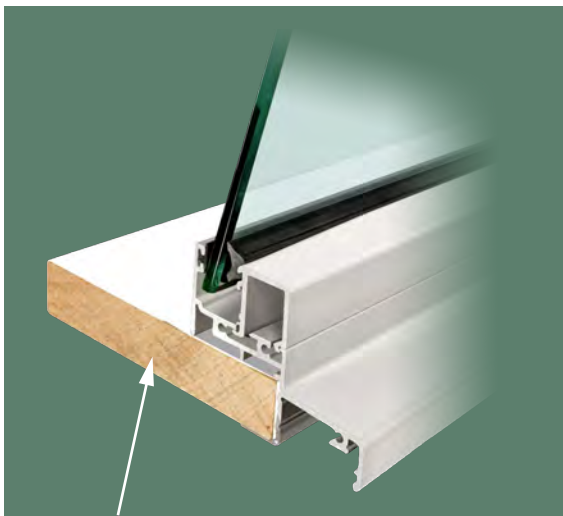

Reveals are pre-primed to ensure a smooth finish when painting

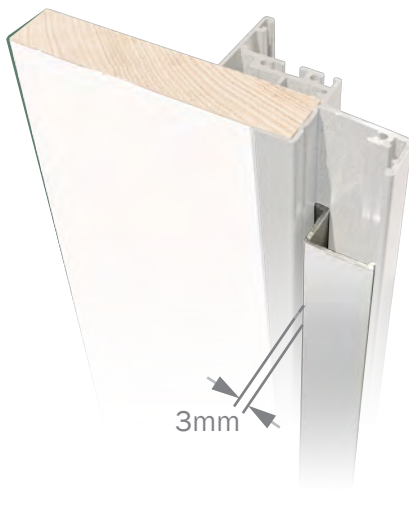

The optional snap-in frame closure has a 15 x 3mm slot for flashing insertion




All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santoprene inner seal resists shrinkage & also assists with weatherproofing

The primed reveal sits inline with the frame's outer face, simplifying installation into a variety of wall types

FIXED LITE WINDOW



SG SERIES

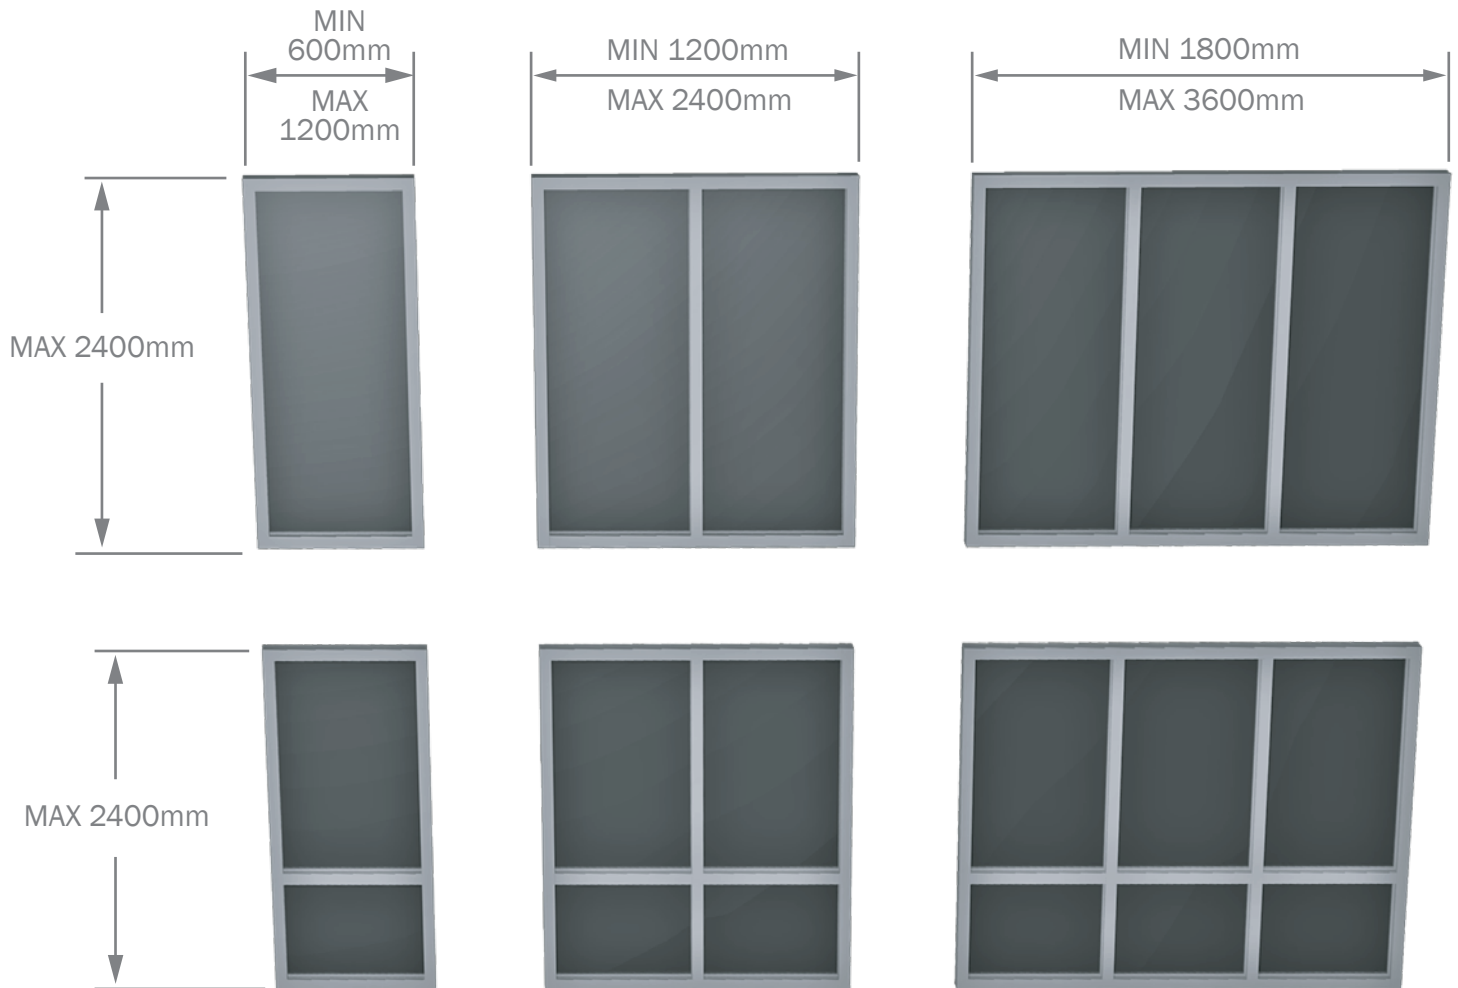

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating, as per AS4055 - 2006

Maximum glass thickness is 6.76mm

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: frame infill, sill flap, glass type